



DCG Partnership I, LTD

Standard Test Method for Flash and Fire Points by Cleveland Open Cup Tester in Accordance to ASTM D 92


DCG has available calibration standards for ASTM D 92 that are used to determine the flash point and fire point of petroleum products by a manual Cleveland open cup apparatus or an automated Cleveland open cup apparatus. These standards are packaged in 250mL amber glass bottles and have been verified by consensus analysis.

Part #: DCGFP200

Description: 200° C Nominal Flash Point

Part #: DCGFP230

Description: 230° C Nominal Flash Point

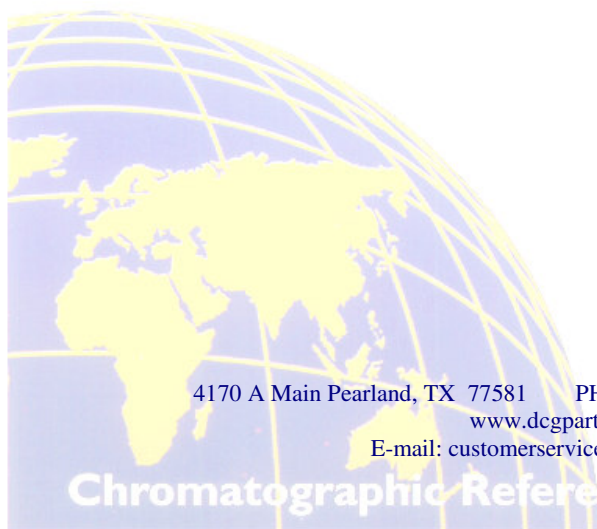

4170 A Main Pearland, TX 77581 PH: 281-648-1894 FAX: 281-648-1895

www.dcgpartnership.com

E-mail: customerservice@dcgpartnership.com

Chromatographic Reference Materials

Copyright © 2009 DCG Partnership I, LTD. All rights reserved. Printed in U.S.A.